

## ECU DALI | Controllers



### Product family features

- Individual control
- Daylight-dependent regulation and presence-dependent control of light
- Intelligent scheduling, task-related lighting, variable load distribution
- Realtime light control, analysis of energy consumption and display of lamp failures

### Product family benefits

- Energy savings up to 75 % (compared to CCG + T8 lamp without sensors)
- DALI based light management system integrable into building management systems
- Worldwide web access and possibility of remote maintenance

### Areas of application

- Offices
- Healthcare
- Public buildings
- Educational sector


## Product datasheet

### Technical data

#### Electrical data

Nominal voltage	24.0 V
System wattage	22.00 W

#### Dimensions & weight

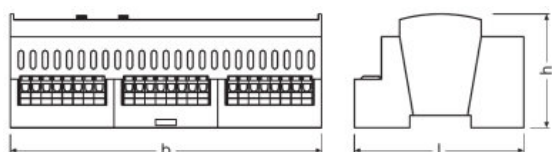

Length	160.0 mm
Width	90.0 mm
Height	63.0 mm
Product weight	350.00 g

#### Temperatures & operating conditions

Ambient temperature range	0...+40 °C
---------------------------	------------

#### Capabilities

Dimmable	No
Type of installation	DIN rail mounting

#### Certificates & standards

Type of protection	IP20
--------------------	------

#### Logistical data

Commodity code	853710989900
----------------	--------------

### Download Data

File
------

## Product datasheet



Product Datasheet  
418098\_ECU DALI - Technical infos (112013)



CAD data  
DALI ECU - CAD Files



CAD data 3-dim  
DALI ECU CAD Data

## Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899016842		Shipping carton box 10	490 mm x 229 mm x 172 mm	19.30 dm <sup>3</sup>	4145.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.