


ATRIUM ASHRAE 90.1-2010 INDIVIDUAL LUMINAIRE WIRED SYSTEM

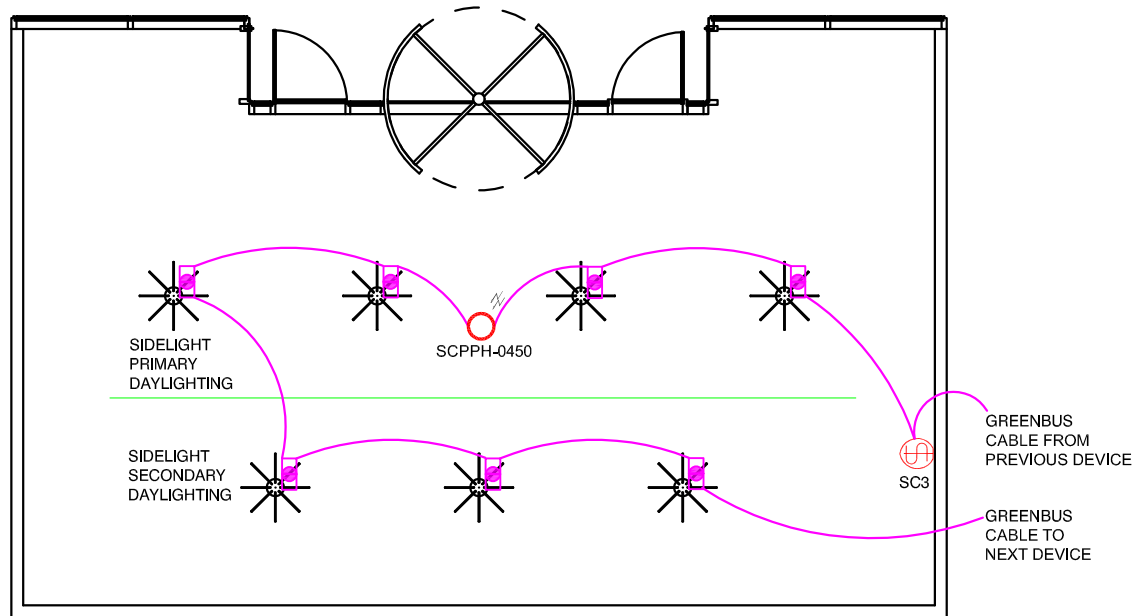

SEQUENCE OF OPERATION

- 1.) MANUAL ON/OFF AND FULL RANGE DIMMING CONTROL OF GENERAL LIGHTING WITH WALL SWITCH. OPTIONAL 3 SCENE CONTROL.
- 2.) TIME SCHEDULE TURNS LIGHTS ON TO 50% DURING NORMALLY OCCUPIED HOURS.
- 3.) AUTOMATIC DAYLIGHT RESPONSIVE CONTROL FOR SIDE LIGHTING.
 - NOT REQUIRED IF ROOM HAS <240SQFT OF GLAZING OR LIGHTING LOADS <120W, IN THE SIDELIT ZONE.

DESIGN CONSIDERATIONS

- 1.) ENCELIUM BACKBONE IS NEEDED VIA SYSTEM SUPPORT UNIT (SSU) ALONG WITH A NETWORK SWITCH. (REF DATA SHEET. LMS054)
- 2.) WIRED MANAGER (M) IS NEEDED WHICH CAN ACCOMMODATE UP TO 800 INDEPENDENT DEVICES. (REF DATA SHEET. LMS093)
- 3.) IF EMERGENCY UL924 RATED DEVICE IS REQUIRED, WIRED MANAGER (M) IS RATED FOR CENTRAL SENSE, IF LOCAL SENSE IS REQUIRED A THIRD-PARTY DEVICE WILL BE NEEDED.(REF DATA SHEET. 1ESRN)

TYPICAL DESIGN WITH CONTROL INTENT

ILLUSTRATION ONLY, ELECTRICAL CONTRACTOR RESPONSIBLE FOR APPLICATION SPECIFIC WIRING.

LEGEND - ENCELIUM SYSTEM GREENBUS COMPONENTS

QTY	SYMBOL	DESCRIPTION
1	 SCPPH-0450	GREENBUS PHOTOCELL SENSOR 360 DEG, LOW VOLTAGE, CEILING MOUNT, BUILT-IN OCCUPANCY SENSOR, PIR, 450 SQ.FT COVERAGE(OPTIONAL), NO SIM REQUIRED. (/) - PHOTOCELL ACTIVE
1	 SC3	ENCELIUM LOW VOLTAGE - SCENE CONTROL WALL STATION (SC3) - THREE SCENES
7	 SC3	LUMINAIRE CONTROL MODULE (LCM)
	 SC3	GREENBUS CABLE. PRE-TERMINATED (18AWG X 2) MAXIMUM CONNECTED LENGTH OF WIRING IS 2500FT. PER CHANNEL