


ENCELIUM®LUMINAIRE CONTROL MODULE (LCM) - WIRE TABLE

BLACK	LINE (IN) - RELAY CONTACT
BLACK	LINE (OUT TO BALLAST) - RELAY CONTACT
VIOLET	(+) CLASS 2, LOW VOLTAGE, 0-10 VDC
GREY	(-) CLASS 2, LOW VOLTAGE RETURN, COMMON

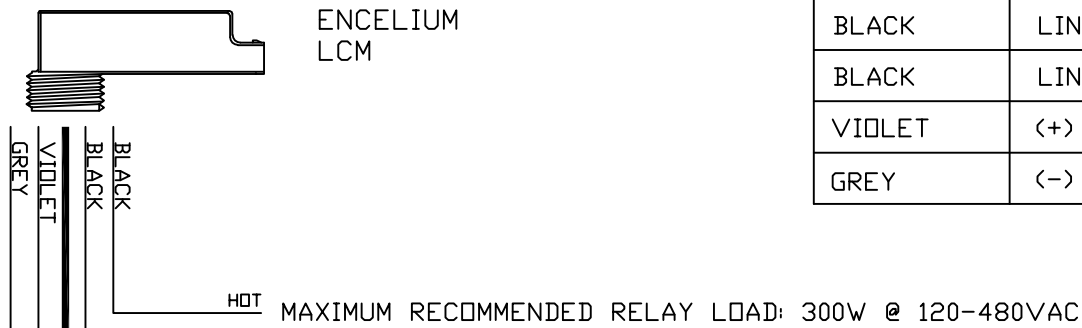


LUMINAIRE CONTROL MODULE

EN-ILCM-1R10V-GB2-BK (Item number: 45552)


EN-ILCM-1R10V-GB2-BKDR* (Item number: 45553)

* FOR DAMP RATED LOCATIONS

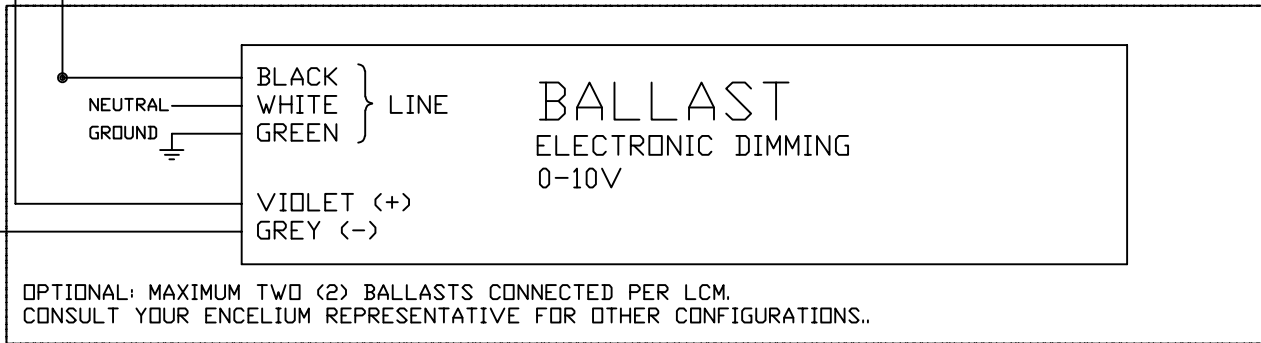

NOTES:

1. LCM MUST BE PROPERLY SECURED IN FIXTURE WITH RETAINER NUT.
2. REFER TO BALLAST MANUFACTURER'S DOCUMENTATION FOR COMPLETE WIRING SPECIFICATIONS.
3. WIRE UNIT IN ACCORDANCE WITH ALL APPLICABLE ELECTRICAL AND BUILDING CODES.
4. DO NOT CONNECT MORE THAN TWO (2) BALLASTS PER LCM.
5. FOR COMPATIBILITY WITH OTHER CONFIGURATIONS ON ENCELIUM PRODUCTS CONTACT YOUR REPRESENTATIVE.

REV	DESCRIPTION/CHANGE	DATE
 www.encelium.com		
TITLE (DIMMING) - EN-LCM-1R10V-GB2-BK		
SCALE NTS	PROJ NO. --: --	
DRAWN S.PANERI	DWG. NO. 77-026-RO	SIZE A
DATE 15-APR-21	FILE NAME 77-026-RO-LCM-DIM	