


ENCELIUM PHASE CUT DIMMER MODULE (PCDM)

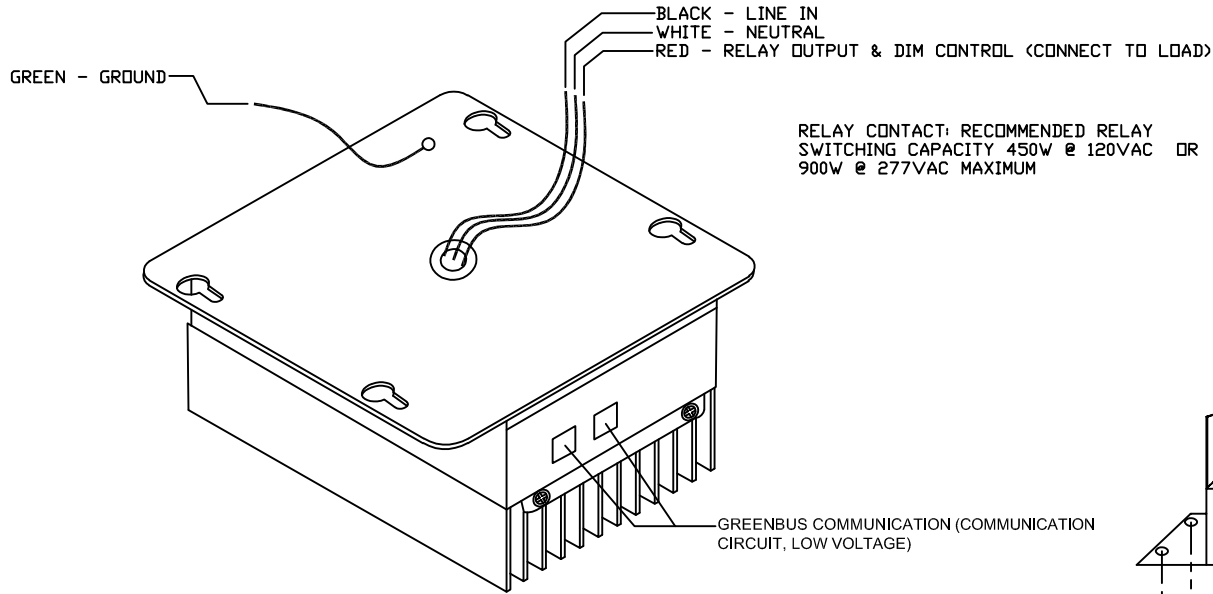


RELAY CONTACT: RECOMMENDED RELAY SWITCHING CAPACITY 450W @ 120VAC OR 900W @ 277VAC MAXIMUM

ENCELIUM PHASE CUT DIMMING MODULE (PCDM) - WIRE TABLE


BLACK	LINE (IN)
WHITE	NEUTRAL
RED	RELAY OUTPUT & DIM CONTROL (CONNECT TO LOAD)

PHASE CUT DIMMING MODULE

EN-PCDM-GB2

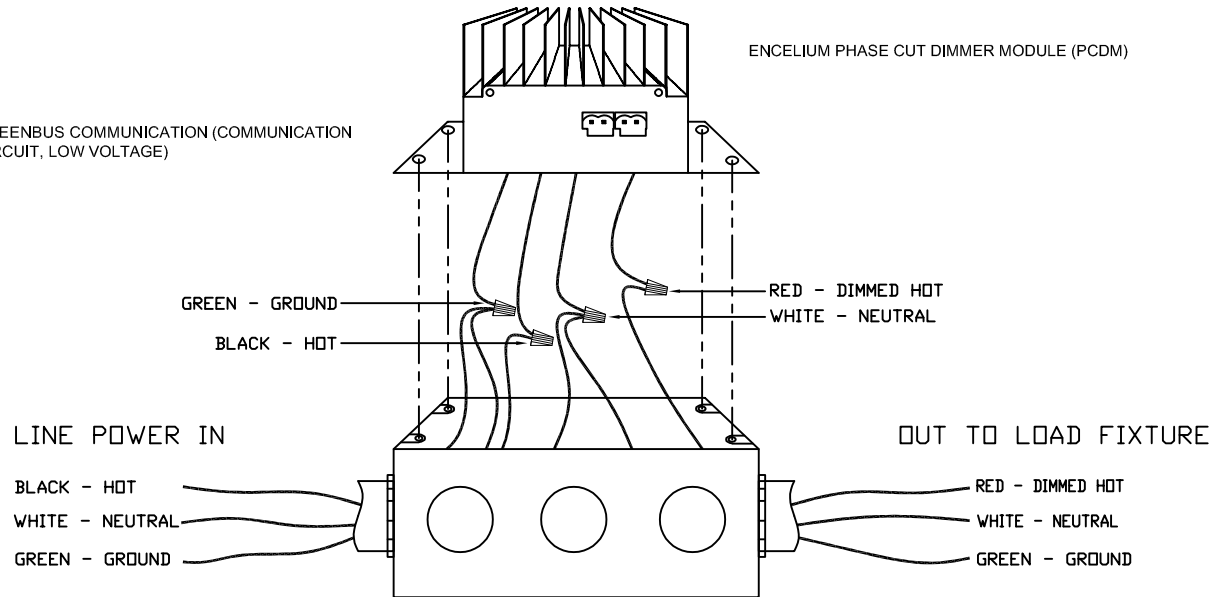

- NOTES:
- FOR EASE OF INSTALLATION ENCELIUM GREENBUS USES PROPRIETARY CONNECTORS AND JACKS ONLY.
 - ENCELIUM GREENBUS IS A PROPRIETARY STANDARD. CONNECT TO ENCELIUM ENERGY MANAGEMENT SYSTEM ONLY. DO NOT CONNECT TO OTHER CIRCUITS.
 - WIRE UNIT IN ACCORDANCE WITH ALL APPLICABLE ELECTRICAL AND BUILDING CODES.
 - USE OF ELECTRICAL JUNCTION BOX REQUIRED.
 - REFER TO ENCELIUM PCDM INSTALLATION AND SERVICE MANUAL BEFORE INSTALLING OR SERVICING MODULE.
 - FOR COMPATIBILITY WITH OTHER CONFIGURATIONS ON ENCELIUM PRODUCTS CONTACT YOUR REPRESENTATIVE.
 - DIMMING LENGTH 50FT MAX FROM PCDM

REV	DESCRIPTION/CHANGE	DATE
 www.encelium.com		
TITLE <i>PHASE CUT DIMMING MODULE (PCDM)</i>		
SCALE <i>NTS</i>	PROJ NO.	
DRAWN <i>S.PANERI</i>	DWG. NO. <i>EN-GB-010-R0</i>	SIZE <i>A</i>
DATE <i>05-MAY-2021</i>	FILE NAME <i>EN-GB-010-R0-PCDM</i>	