


ENCELIUM SENSOR INTERFACE MODULE (SIM)
TO
DRY CONTACT CLOSURE - WIRE TABLE

RED	(+) CLASS 2, LOW VOLTAGE.
BLACK	NOT USED
BLUE	SIGNAL

NOT USED
CAP OFF WIRE
END WITH UL
LISTED WIRE
NUT.

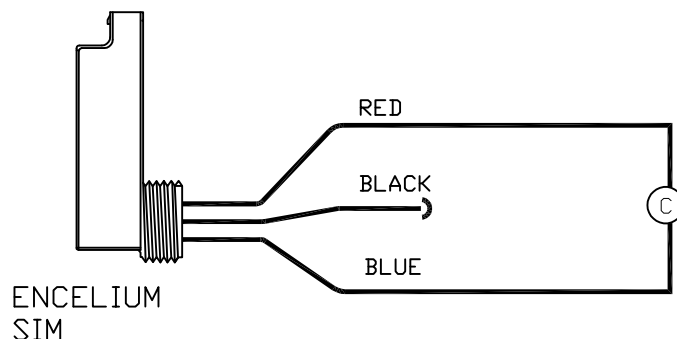


NORMALLY OPEN (N.O.)
DRY CONTACT

NOTES:

1. REFER TO ENCELIUM SENSOR INTERFACE MODULE INSTALLATION AND SERVICE MANUAL BEFORE INSTALLING OR SERVICING UNIT.
2. WIRE UNIT IN ACCORDANCE WITH ALL APPLICABLE ELECTRICAL AND BUILDING CODES.
3. INTERCONNECT UNITS WITH ENCELIUM PRETERMINATED GREENBUS COMMUNICATION CABLE ONLY (CLASS 2, FLAME RATING: FT6/CMP).
4. FOR INTERCONNECTION DETAILS WITH OTHER DEVICES (BALLASTS, SENSORS, ETC.) REFER TO SPECIFIC INSTRUCTIONS FOR THE DEVICE OR CONTACT ENCELIUM.
5. UNIT MUST BE SECURELY MOUNTED WITH RETAINER NUT. USE OF APPROPRIATE ELECTRICAL JUNCTION BOX RECOMMENDED.
6. CONTAINS NO USER SERVICEABLE PARTS, REPLACE ENTIRE UNIT.
7. CAP OFF UNUSED WIRES WITH UL LISTED WIRE NUT.

cULus LISTED

REV	DESCRIPTION/CHANGE	DATE
 www.encelium.com		
TITLE <i>SIM to CONTACT CLOSURE</i>		
SCALE --:--	PROJ NO. --:--	
DRAWN <i>S.PANERI</i>	DWG. NO. <i>EN-GB-007-R0</i>	SIZE A
DATE <i>05-MAY-21</i>	FILE NAME <i>EN-GB-007-R0-SIM-CC</i>	