
ENCELIUM SENSOR INTERFACE MODULE (SIM) TO DRY CONTACT CLOSURE - WIRE TABLE

RED	(+) CLASS 2, LOW VOLTAGE.
BLACK	NOT USED
BLUE	SIGNAL

NOT USED CAP OFF WIRE END WITH UL LISTED WIRE NUT.

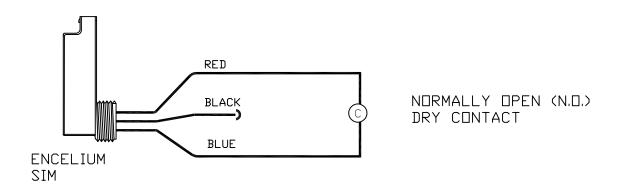

NOTES:

- 1. REFER TO ENCELIUM SENSOR INTERFACE MODULE INSTALLATION AND SERVICE MANUAL BEFORE INSTALLING OR SERVICING UNIT.
- 2. WIRE UNIT IN ACCORDANCE WITH ALL APPLICABLE ELECTRICAL AND BUILDING CODES.
- 3. INTERCONNECT UNITS WITH ENCELIUM PRETERMINATED GREENBUS COMMUNICATION CABLE ONLY (CLASS 2, FLAME RATING: FT6/CMP).
- 4. FOR INTERCONNECTION DETAILS WITH OTHER DEVICES (BALLASTS, SENSORS, ETC.) REFER TO SPECIFIC INSTRUCTIONS FOR THE DEVICE OR CONTACT ENCELIUM.
- 5. UNIT MUST BE SECURELY MOUNTED WITH RETAINER NUT. USE OF APPROPRIATE ELECTRICAL JUNCTION BOX RECOMMENDED.
- 6. CONTAINS NO USER SERVICEABLE PARTS, REPLACE ENTIRE UNIT.
- 7. CAP OFF UNUSED WIRES WITH UL LISTED WIRE NUT.

cULus LISTED

