
ENCELIUM INDUSTRIAL CONTROLLER


EN-WS-INDPB-GB2

EN-WS-INDPB-GB2-DR*

*FOR DAMP RATED LOCATIONS



INDPB CONNECTION TO GREENBUS

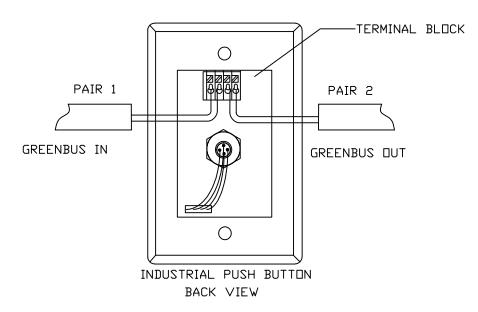

GREENBUS WIRES (PAIR 1 & 2) SHOULD NOT BE CROSSED. GREENBUS WIRES ARE POLARITY INDEPENDENT. JACKET COLORS ARE BASED ON SUPPLIED WIRE. OTHER WIRE JACKET COLORS MAY VARY.

NOTES:

- 1. REFER TO ENCELIUM INSTALLATION AND SERVICE MANUAL BEFORE INSTALLING OR SERVICING UNIT.
- 2. WIRE UNIT IN ACCORDANCE WITH ALL APPLICABLE ELECTRICAL AND BUILDING CODES.
- 3. WIRE ONLY WITH CLASS 2, LOW VOLTAGE ENCELIUM GREENBUS PRETERMINATED CABLE WITH PLENUM (CMP/FTP) FLAME RATING.
- 4. FOR INTERCONNECTION DETAILS WITH OTHER DEVICES (BALLASTS, SENSORS, ETC.) REFER TO SPECIFIC INSTRUCTIONS FOR THE DEVICE OR CONTACT ENCELIUM.
- 5. USE OF APPROPRIATE ELECTRICAL JUNCTION BOX RECOMMENDED.
- 6. CONTAINS NO USER SERVICEABLE PARTS, REPLACE ENTIRE UNIT.
- 7. TO REMOVE THE GREENBUS CABLE, DEPRESS THE LOCKING MECHANISM.

cULus LISTED

